


Motors and drives

DC Brushless torque motor



Extensive range of electric motors, from a few Watts to more than 200 kW. These motors are intended to fit on-board aerospace, defence, and other demanding environments. They are available as a line replaceable unit (housed) or frameless that can be integrated by the customer. These low friction motors power high torque drives while preventing the need for a reduction gear.

General outline

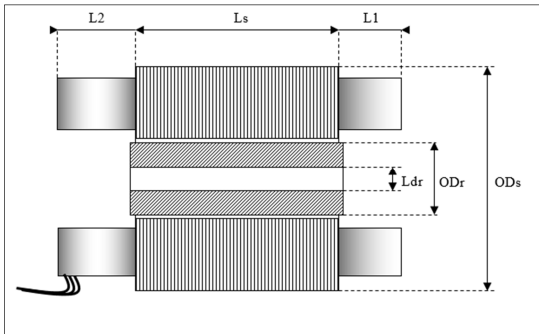

Outside dia. Stator (ODs)
 Outside dia. Rotor (ODr)
 Stack lamination length (Ls)
 End turns length (L1)
 End turns length wires output side (L2)
 Inside dia. Rotor (Ldr)

Model	ODs	ODr	Ls	L1	L2	Ldr	Weight	Rotor inertia
	mm	mm	mm	mm	mm	mm	g	Kg.m ²
BMP339C01	269	241.5	39	9	21	219	5500	3.4E-02

Key features

- Low maintenance
- Reduced friction torque and cogging
- Customised designs

Applications

- Conventional radar antennae
- Electro-optical systems
- Remote control weapon systems (RCWS)
- Targeting gimbals rotation

Contact

Artus

37 Ch. Du Champ des Martyrs
 BP 20009
 49241 Avrillé Cedex
 France
 Tel: +33 (0) 241 336 340
 artus.sales@meggitt.com
 www.meggittpower.com

Meggitt Sensing Systems

Our product competencies and services:

Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring

MSSArtus_DCmotor2_201802

Motors and drives

DC Brushless torque motor

Specifications

	Symbol	Unit	BMP339C01
Size constants			
Continuous stall torque	T_c	Nm	52.000
Motor constant	K_m	Nm/ \sqrt{W}	2.74675
Cogging Torque (peak/peak)	Cogg	Nm	2.2000
Motor friction torque	T_f	Nm	0.750
Viscous friction torque	F_i	Nm/rad/s	2.3E-02
Max. winding temperature		°C	180
Ultimate temperature rise/Watt	TPR	°C/W	0.2
Number of poles	2p	-	38
Winding constants (alternate windings available)			
Terminal DC voltage	U_{dc}	V DC	110
Peak torque	T_p	Nm	100.000
Peak current	I_p	A	17.76
Torque Sensitivity Ph to N at max. current	K_t Ph/N	Nm/A	3.25000
Back EMF peak Ph to N	K_b Ph/N	V/(rad/s)	3.25000
Resistance Phase to neutral @ 25°C	R Ph/N	Ohm	2.10
Inductance Phase to neutral	L Ph/N	mH	2.00
No Load Speed	Ω_0	Rpm	185
Winding Connection	/	/	Star
Mechanical Time Constant	τ_m	ms	6.66
Electrical Time Constant	τ_e	ms	0.95

Note: Due to continuous process improvement, specifications are subject to change without notice

Meggitt Sensing Systems


Our product competencies and services:
 Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring

MSSArtus_DCmotor2_201802

Motors and drives

DC Brushless torque motor

Performance curves

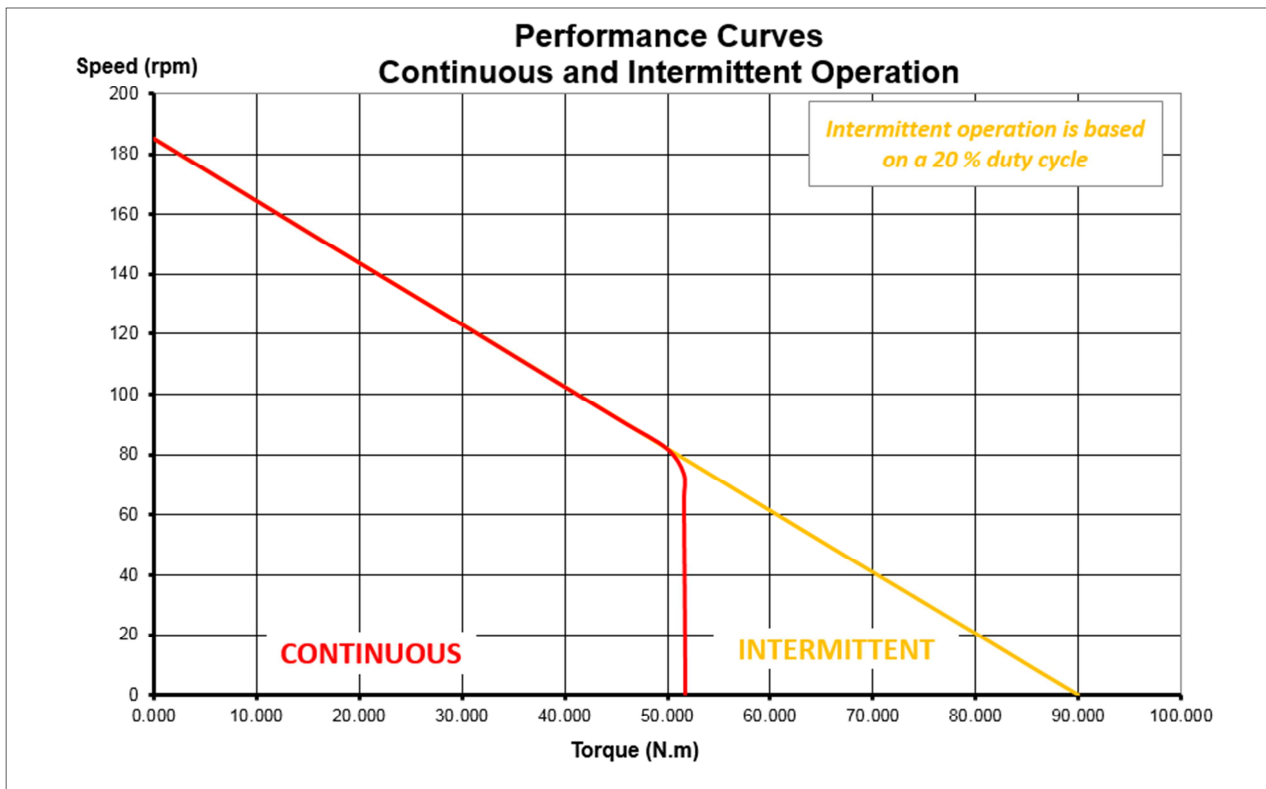

BMP339C01

Performance curves and TPR assume with housed motor mounted to (270 x 270 x 6) mm

Notes:

1. Typical electrical specification at 25 °C
2. Many other custom mechanical options are available – for assistance please contact our applications engineer
3. Many other winding options are available - for assistance please contact our applications engineer
4. Housed or frameless designs are available

Meggitt Sensing Systems

Our product competencies and services:
 Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring

MSSArtus_DCmotor2_201802

MEGGITT
 smart engineering for
 extreme environments