



Position sensors

RVDT size 08

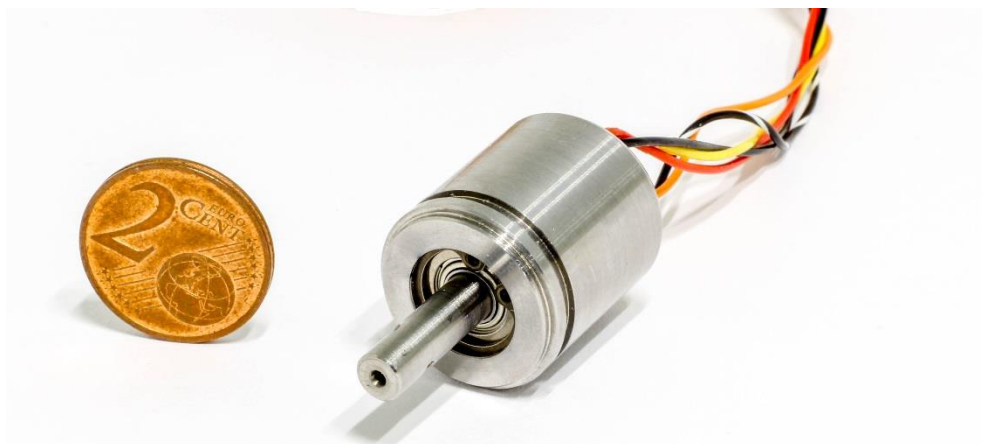

A RVDT (Rotary Variable Differential Transformer) is an angular position sensor that produces two output voltages of amplitude linear versus the angular position of the input shaft. RVDT are simple and robust sensors, able to work in harsh environments. Each design can be specific for each application. Please contact our team to discuss your latest requirements.

General outline

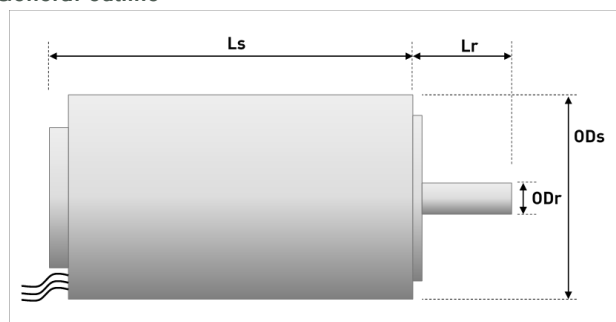

Outside dia. Stator (ODs)
 Outside dia. Shaft (ODr)
 Casing length (Ls)
 Shaft length (Lr)

Model	ODs	ODr	Ls	Lr	Weight	Rotor inertia
Unit	mm	mm	mm	mm	g	Kg.m ²
C08DRh	20	3.048	21	12.5	45	7.5E-08

Key features

- Brushless, variable reluctance
- Low weight and length
- Adjusted to secondary loads conditions
- Housed unit, standard interface
- Custom modifications available

Applications

- Cockpit controls
- Engine controls
- Flight controls
- Targeting systems

Contact

Artus

37 Ch. Du Champ des Martyrs
 BP 20009
 49241 Avrillé Cedex
 France
 Tel: +33 (0) 241 336 340
 artus.sales@meggitt.com
 www.meggittpower.com

Meggitt Sensing Systems

Our product competencies and services:
 Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring

Position sensors

RVDT size 08

Specifications

	Symbol	Unit	C08DRh
Type and size constants			
Type of structure	/	/	Can-type, primary on rotor
Functional angular range	/	Degree	±35°
Energizing voltage	/	/	7 V _{RMS} , Sine wave, DC offset ≤ 50 mV
Friction torque (max)	/	Nm	0.5E-03
Axial play (max)	/	mm	0.040
Radial play (max)	/	mm	0.015

Winding constants (alternate options available)

Energizing frequency	F	Hz	3000
Input current (max)	I _a	mA _{RMS}	20
Sum voltage	U _{SUM}	V _{RMS}	4
Reference angle	Θ _{REF}	°	42.6
Gradient (on each single voltage)	G	mV/°	47
Accuracy (guaranteed; see curves)	ε	°	± 0.6
		Arcmin.	± 36

Note: Due to continuous process improvement, specifications are subject to change without notice

Meggitt Sensing Systems


Our product competencies and services:
 Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring

MSSArtus_Sensors_201810




Position sensors RVDT size 08

Voltage diagram

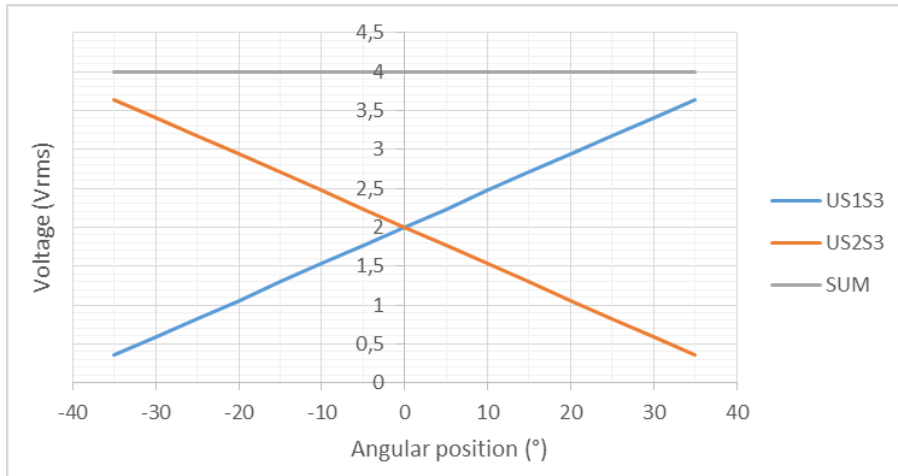

US_{1S3} and US_{2S3} designate both output signals, for a 7 V_{RMS} excitation signal.

Accuracy limits

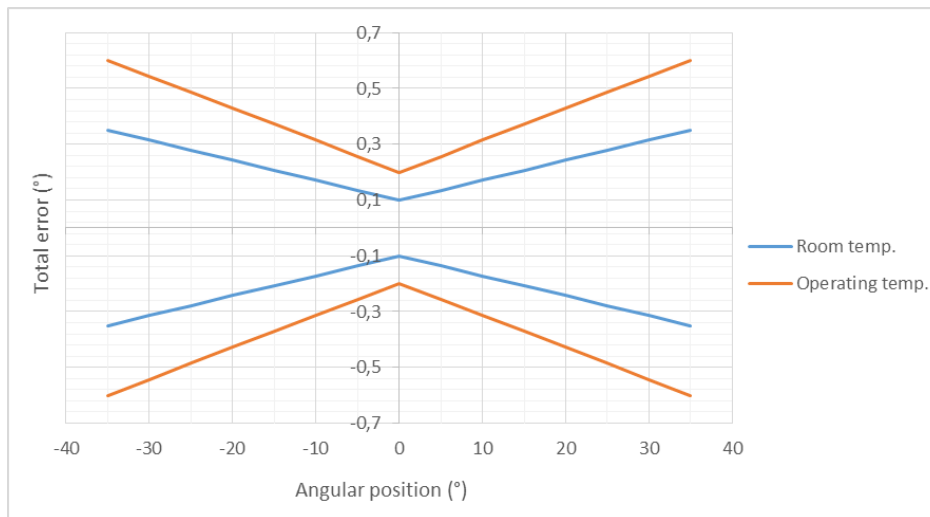

C08DRh

Notes:

1. Typical electrical performances are given at 25 °C.
2. Accuracy curves for operating temperatures are given for [-40°C to +85°C] range.
3. Other custom mechanical options are available – please contact our applications engineer.
4. Compatibility to specific environment is analysed on request - please contact our applications engineer.

Meggitt Sensing Systems

Our product competencies and services:
 Avionics displays | Inertial sensors | Ignition systems |
 Performance Sensing | **Power & Motion** | Sensing & Monitoring